


avidsen

EN
v7

REMOTE CONTROL

For electric gate opener
Ref. 114253



A - SAFETY INSTRUCTIONS

A1 - OPERATING PRECAUTIONS

- Read this manual carefully before installing.
- Do not allow children to handle the product.
- For detailed use of the remote control (pedestrian access, deleting), please refer to the gate opener instructions.
- This remote control is compatible only with Avidsen and Easymate gate openers fitted with one of the electronic cards described in these instructions. If in doubt regarding compatibility, please do not hesitate to contact our technical support service.

A2 - SERVICING AND CLEANING

- Use a soft, slightly damp cloth to clean your product.
- Do not use abrasive or corrosive substances.
- Do not spray any products directly onto the unit.

A3 - RECYCLING



The disposal of used batteries in household waste is strictly forbidden. Batteries/accumulators containing harmful substances are marked with symbols (shown opposite) which indicate that it is forbidden to discard them in the household waste. The corresponding heavy metals are referred to as follows: Cd= cadmium, Hg= mercury, Pb= lead. You can dispose of these used batteries/accumulators at local waste treatment centres (centres for sorting recyclable materials), which are required to accept them. Keep batteries/button cells/accumulators out of reach of children and store them in a safe place not accessible to them. They could be swallowed by children or pets. Risk of death! In the event that a battery is swallowed, consult a doctor or go to A&E immediately. Never short-circuit the batteries, and do not burn or recharge them as they may explode!




This symbol means that devices no longer in use should not be disposed of with household waste as they are likely to contain hazardous substances that are dangerous to health and the environment. Return the equipment to your local distributor or use the recycling collection service provided by your local council.





B - PRODUCT DESCRIPTION

B1 - REMOTE CONTROL



Every key can be programmed to operate an automatic sliding or swinging gate, or garage door opener. Only one key is required to control one automatic opener.

C - REPLACING THE REMOTE CONTROL BATTERY

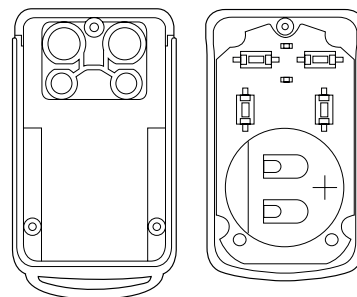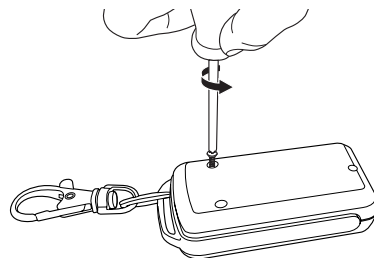

D - TECHNICAL AND LEGAL INFORMATION

D1 - TECHNICAL FEATURES

- Type: AM On/Off Keying (OOK) modulation. 16-bit Rolling code encoder (i.e. 65,536 possible combinations)
- Frequency: 433.92MHz
- Power supply: CR2032
- Keys: 4 keys
- Radiated power: < 10mW
- Battery life: 1 year at a rate of 10 x 2s uses per day
- Operating temperature: -20°C/+60°C
- Protection rating: IP40 (For indoor use only: home, car or sheltered location)

- Your product is guaranteed for parts and labour for 2 years from the date of purchase. Proof of purchase must be retained for the duration of the warranty period.
- The warranty does not cover the battery, nor does it cover damage caused by negligence, knocks, or accidents.
- None of the components of this product may be opened or repaired by any persons not employed by Avidsen except to insert or replace the battery.
- The warranty will be void if the device is tampered with.

D2 - HELP AND ADVICE

- Despite the care we have taken in designing our products and drafting these instructions, you may still encounter difficulties when installing your product, or have questions. If this is the case, please do not hesitate to contact one of our specialists who will be glad to help.
- If you have any operating problems during or shortly after the installation, please ensure you next to your installation when contacting us, so that one of our technicians can diagnose the source of the problem, as this is often caused by an incorrect setting or an installation that is not to specification. If the problem is caused by the product itself, the technician will give you an RMA number so that you can return the unit to the shop. Without this RMA number, the shop may refuse to exchange your product.

If you need advice for the operation or installation of your product, please contact our after-sales service team technicians:

0 892 701 369 Service 0,35 € / min
+ prix appel

Monday to Friday, 9am to 12pm, and 2pm to 6pm.

Avidsen undertakes to keep a stock of spare parts for this product throughout the contractual warranty period.

D3 - DECLARATION OF CONFORMITY

Avidsen declares, under its sole responsibility, that the equipment with reference number 114253 complies with the applicable Union harmonisation legislation. Its conformity has been assessed pursuant to the applicable standards in force:

- Directive RED 2014/53/EU
EN 300220-1 V3.1.1
EN 300220-2 V3.2.1
- Directive LVD 2014/35/EU
EN 62479:2010
EN 62368-1:2014 + A11:2017
- Directive EMC 2014/30/EU
EN 301489-1 V2.2.3
EN 301489-3 V2.1.1

The above-mentioned products comply with the RoHS 2011/65/EU Directive and delegated directive 2015/867/EU.

Signed by Alexandre Chaverot, CEO, on behalf of Avidsen
19 avenue Marcel Dassault, 37200 Tours, France
Tours, 15/11/2022

www.avidsen.com



CA2B9TR (SWINGING) AND CA2B9SL (SLIDING)



- 2 secs minimum
- Press once
- Press for 1 sec



AVLO



- 2 secs minimum
- Press once
- Press for 1 sec



SW200D2S



- 3 secs minimum
- Press for 1 sec



STROMMA



- 3 secs minimum
- Press for 1 sec
- Press for 1 sec
- Press for 1 sec

